



FOR SAFE REFRIGERATION AND COOLING CIRCUITS

Replacing the SIHI-NOVAMETIC ZSK-2500 series by HERMETIC refrigerant pumps

SIHI series

SIHI ZSK 2501
SIHI ZSK 2502
SIHI ZSK 2503
SIHI ZSK 2504
SIHI ZSK 2505


HERMETIC model series

HERMETIC pump type CAMS 2/2
HERMETIC pump type CAMS 2/3
HERMETIC pump type CAMS 2/4
HERMETIC pump type CAMS 2/5
HERMETIC pump type CAMS 2/6

Advantages of model series CAMS

- directly replaceable
- same connections
- identical mounting dimensions
- no conversion work on pipelines necessary
- low maintenance costs
- high availability
- fast delivery times

Replacing the SIHI-NOVAMETIC ZSK-2500 series by HERMETIC refrigerant pumps

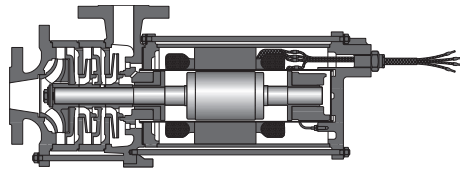

Series CAM


Application ranges

- operating temperature –50 °C to +30 °C*
 - capacity up to 13 m³/h
 - head up to 84 m Fls.
- * further temperatures on demand

Pressures / Flanges

- 25 bar design:
 - nominal pressure 25 bar / test pressure 40 bar
 - flanges according DIN EN 1092-2 PN 25 bar Form D (with groove)
 - nominal size suction flange DN 40 nominal size pressure flange DN 25
- 40 bar design:
 - nominal pressure 40 bar / test pressure 52 bar
 - flanges according DIN EN 1092-2 PN 40 bar Form D (with groove)
 - nominal size suction flange DN 40 nominal size pressure flange DN 25

Performance Curve CAMS

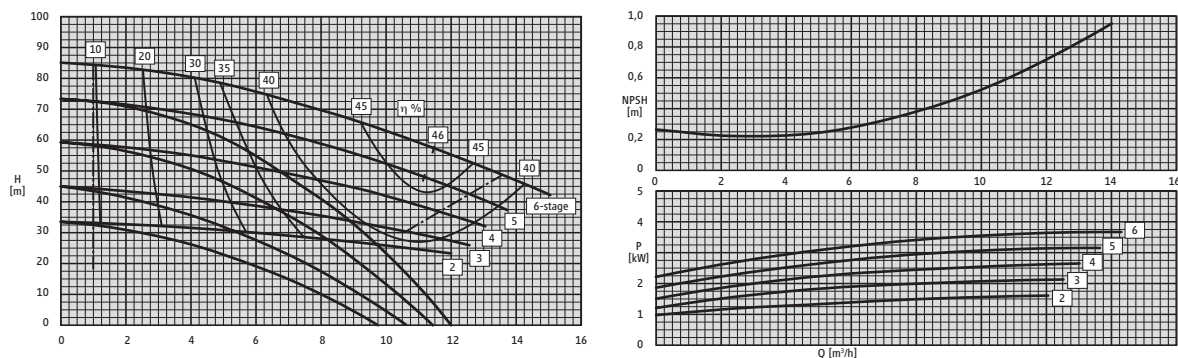

For more information, please contact our technical sales team.



HERMETIC-Pumpen GmbH · D-79194 Gundelfingen
 hermetic@hermetic-pumpen.com · www.hermetic-pumpen.com